

Best Auto Gate Brands in Singapore: Which Models Fit Your Gate?

By [DirectHome Team](#) Updated 16 September 2026 8 min read [Explore our auto gates service ↗](#)

For shorter residential swing leaves, FAAC 412 is one model to assess; BFT PHOBOS BT A25, DEA LOOK, Nice TO4024 and Beninca BOB3024E offer different length limits or configurations. For a sliding gate, CAME BXV is a separate type of operator. The best choice is the model that fits your actual gate, with the protection, controls and Singapore support included in the proposal.

Need advice for your home?

[WhatsApp our team ↗](#)



Compare the model behind the badge

Exact model

Gate compatibility


Local parts route

Who supports it?

A brand badge cannot answer all three.

Compare the exact operator, its suitability for the gate and the available support. The brand badge alone does not establish those details.

What Actually Matters When Picking a Brand

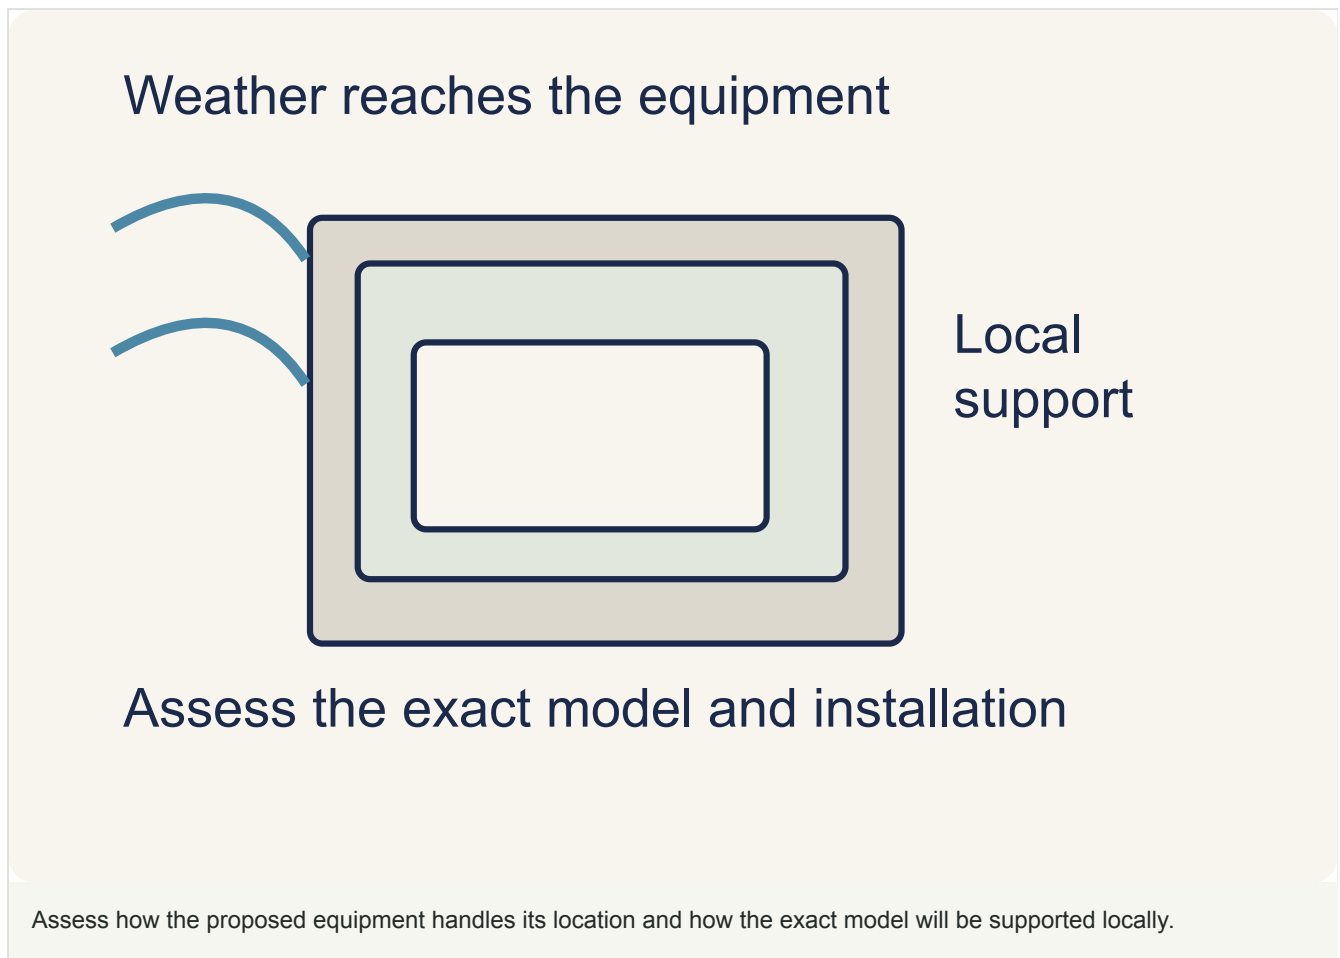

An auto gate brand is only the starting point. The proposed operator must suit the gate's geometry, weight, wind exposure and expected use. Ask the installer to identify the exact model and explain how it has been selected for the site.

For Singapore's outdoor conditions, check the specified operating environment, enclosure protection, drainage and installation details. An IP rating alone does not establish that a motor will tolerate flooding or an unsuitable mounting position. Confirm who can obtain replacement parts and service this model locally.

Consider two proposals for the same driveway. One replaces the operator but leaves a worn hinge unresolved; the other includes the hinge repair and commissioning of the complete gate. Even with the same motor badge, these are different offers. The second scope addresses why the gate was difficult to move, while the first may put that resistance onto the new operator. Model selection and the condition of the retained gate need to be understood together.


Reference models, not a ranking or confirmation of Singapore stock. A leaf is one moving panel. Length, weight, wind exposure and mounting limits must be checked together; the sliding operator does a different job from the swing arms.

Brand and reference model	Gate and documented distinction	When it belongs on a shortlist
<u>FAAC 412</u>	230 V swing operator; leaf width up to 1.8 m; 18 cycles/hour	A shorter residential swing leaf within its mounting and use limits
<u>BFT PHOBOS</u> <u>BT A25</u>	24 V swing; up to 2 m without electric lock, 2.5 m with one	A quoted A25 installation where the lock requirement changes the complete scope
<u>CAME</u> <u>BXV06AGS</u>	24 V sliding operator; published limits 600 kg and 18 m	A sliding leaf needing a suitably rated rack-and-pinion drive
<u>DEA LOOK</u>	Swing family: 320 mm or 520 mm actuator strokes, for leaves up to 3 m or 5 m respectively	Longer swing leaves, using the exact version and weight/length limits
<u>Nice TO4024</u>	24 V swing model for leaves up to 3 m	A swing proposal whose motor and MC824H control arrangement meet the required functions
<u>Beninca</u> <u>BOB3024E</u>	24 V swing model with encoder; leaves up to 3 m; optional battery operation	A swing proposal where movement feedback and specified blackout accessories matter

A 2.2 m swing leaf is already beyond the FAAC 412 reference limit. The BFT A25 can cover that length only with the electric-lock condition in its manual, while the 3 m reference limits of the Nice and Beninca models leave a different starting shortlist. This is why a useful brand comparison starts with the moving panel and complete installation rather than a premium or mid-range label.

FAAC: Check the Exact Operator

FAAC: identify the operator model

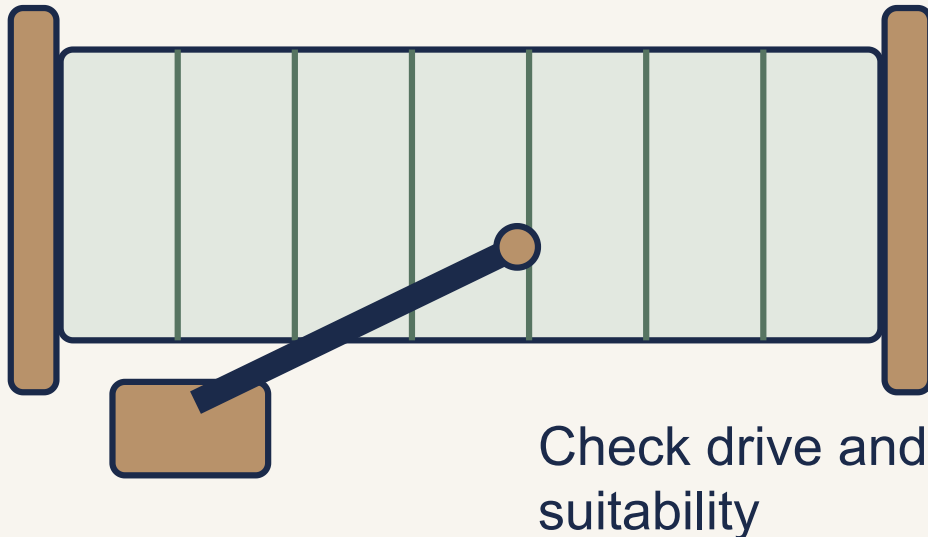

The proposed FAAC model must suit the gate and its drive arrangement; the brand alone does not establish either.

For a swing-gate quote, check the exact operator model: FAAC identifies its 412 as electromechanical. A brand name alone does not tell you the drive mechanism, suitability for your gate or expected service life. Ask the installer to identify the proposed model and confirm local parts availability and maintenance support in writing.

The 412's documented 1.8 m maximum width is per leaf, not the combined driveway opening. Its 18-cycles-per-hour rating also needs the manufacturer's operating conditions. Choose a different suitable operator if the measured gate or concentrated morning use falls outside those limits; a larger FAAC model would be a different comparison.


Compare the whole installed FAAC proposal with the alternatives: operator, controller, safety devices, electrical work and any repairs to the gate itself. A higher brand price does not establish better value unless it buys a difference that matters for your site or support needs.

Start with the fault symptoms before deciding which parts need replacement. [common auto gate faults](#) →

Want an exact price for your home?

Ranges only go so far. WhatsApp us a photo of your space and we'll quote your actual job. No obligation.

BFT: Match the Operator and Controls

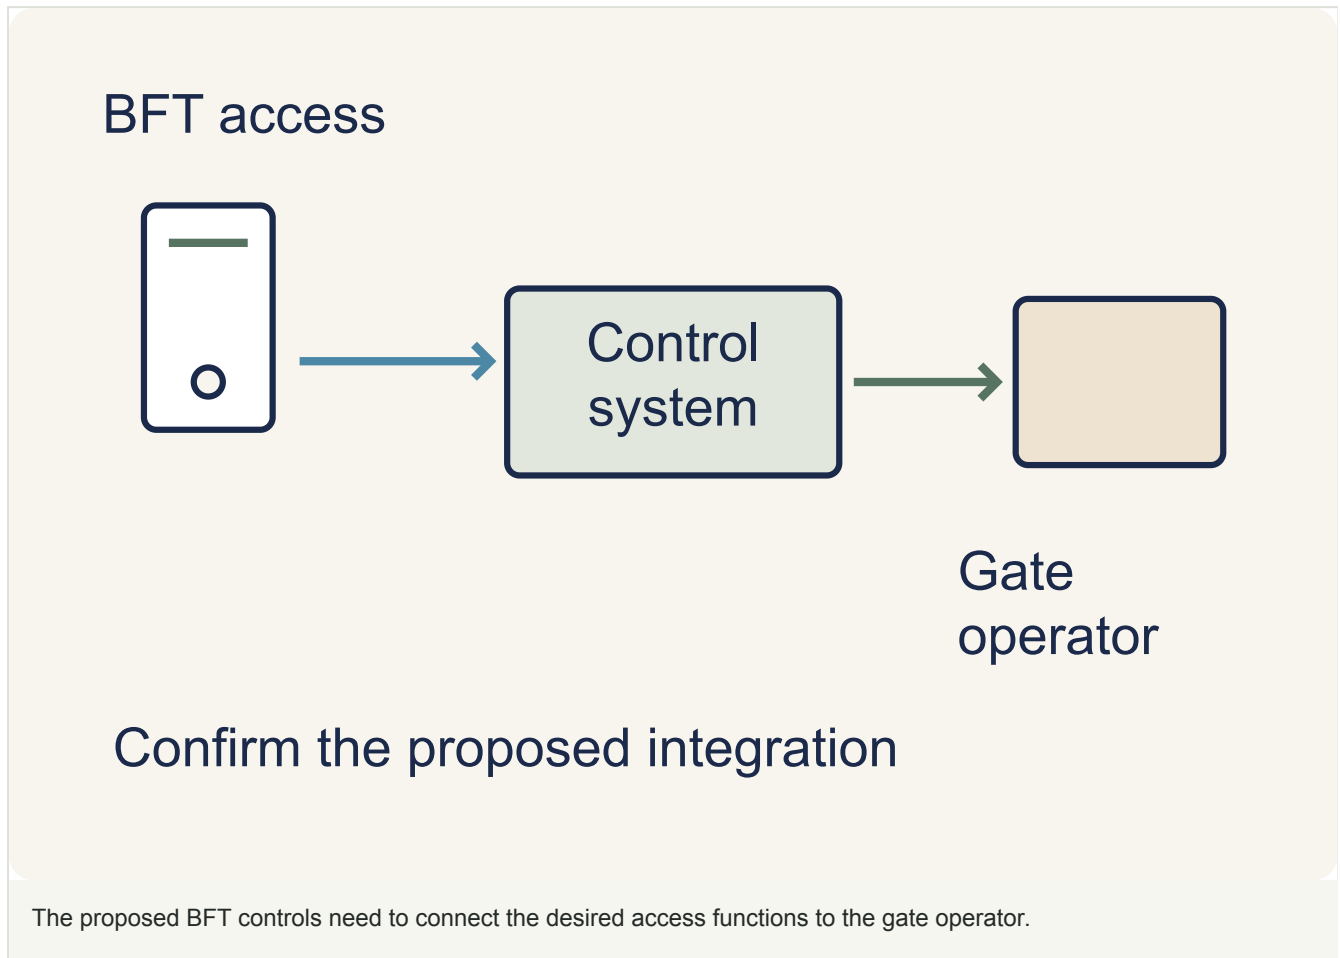


If a BFT system is proposed, ask which operator and controller are included and how their ratings fit the gate. Swing and sliding operators perform different jobs, so compare equivalent configurations rather than treating the brand as one specification.

For the PHOBOS BT A25 specifically, the manufacturer manual distinguishes a leaf up to 2 m without an electric lock from one up to 2.5 m with a lock. It also describes optional battery backup. If that older model is the one offered, price the lock, controller and any backup equipment explicitly; the existence of a 24 V motor does not mean a battery is supplied.

For app or home-automation features, have the installer identify the compatible module and demonstrate the functions included in the quote. Obtain the local service contact and parts arrangements in writing. Neither local stock nor an integration feature can be assumed from the badge.

CAME: Assess the Sliding-Gate Proposal

CAME: assess the sliding arrangement

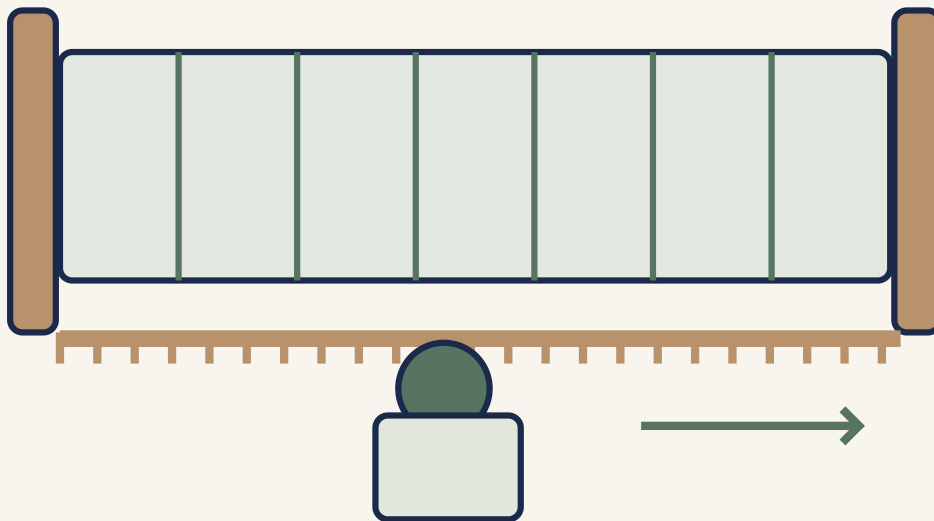

Match operator to the actual leaf

A sliding operator works through the rack and moving leaf, which must be assessed together.


For a CAME sliding-gate proposal, check the exact model against the gate's weight, travel, expected cycles and environment. The installation also needs a sound track or suitable cantilever structure, with protected moving and trapping points.

The BXV06AGS is a concrete CAME example for a sliding gate: its page lists a 600 kg maximum leaf weight, 18 m maximum length and a 24 V motor with encoder. Its CONNECT functions require the appropriate gateway. Those ratings do not prove suitability for every 600 kg gate, and they should not be compared as though the unit were a swing arm.

A motor's stated maximum gate weight is not the whole selection calculation. Panel area, wind, friction and installation geometry matter too. Ask why the proposed operator is appropriate and what groundwork or gate repairs are included.

DEA, Nice and Beninca: Compare the Actual Models

Compare the exact package

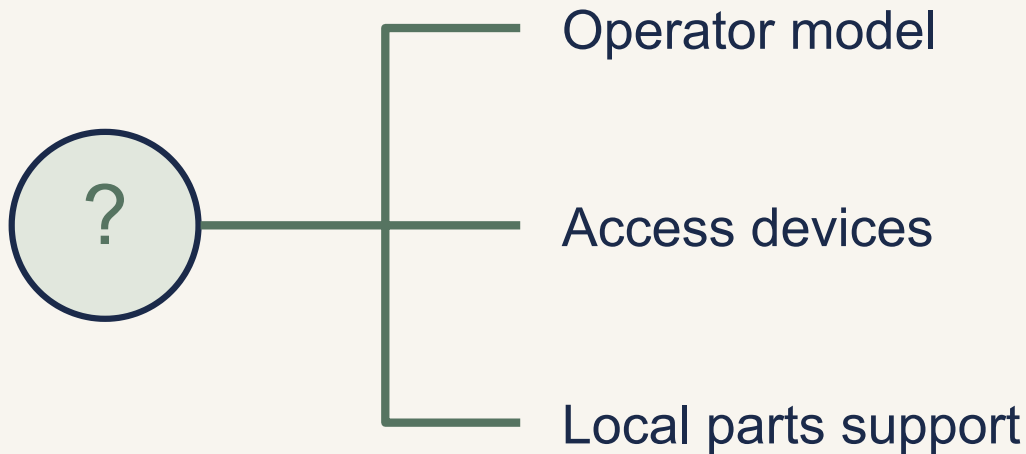


Compare the operator model, access devices and parts support within the complete package.

DEA, Nice and Beninca proposals should receive the same model-level comparison. Identify the operator, controller, accessories and warranty issuer. A manufacturer's range can contain very different products, so a broad mid-range label is not enough to establish suitability.

Within these three brands, the equipment choices differ. LOOK's two actuator strokes address different leaf lengths and mounting travel; Nice's TO4024 belongs to its 24 V Toona range and is paired with the specified controller; Beninca's BOB3024E includes an encoder that reports movement to the controls. Ask for the relevant length-and-weight chart, mounting dimensions and accessory list for the exact version. None of those features establishes a longest-lasting brand or the lowest installed Singapore price.

If hidden motors or connected controls matter, check those features in the selected model's documentation. Confirm drainage and service access for underground equipment, and test any promised app functions at handover. Request a comparable installed quotation before drawing a price conclusion.

When the Components Are Not Identified

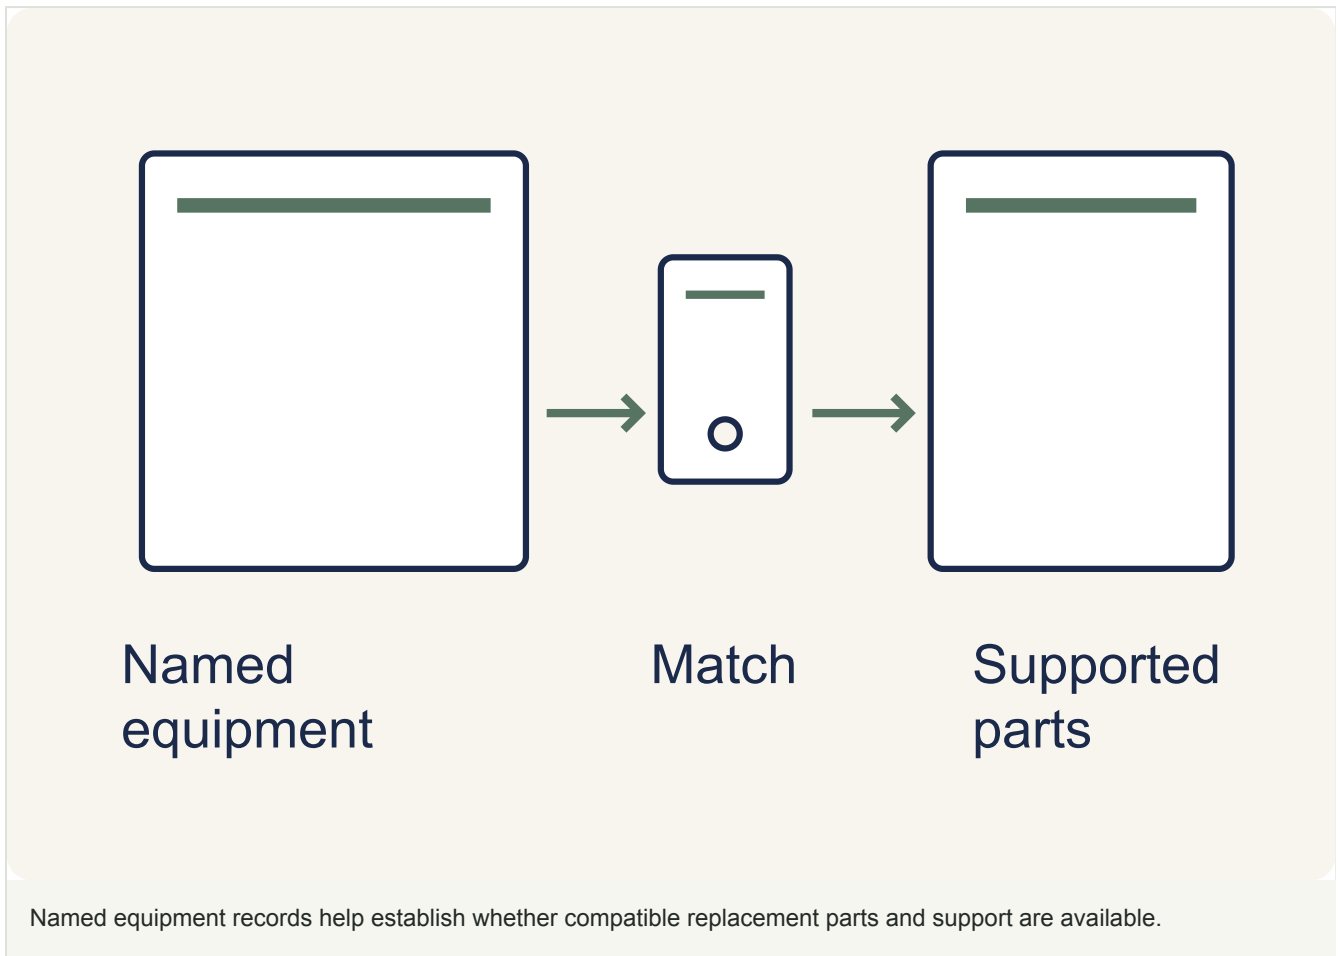


Be cautious when the quote does not identify the operator or controller, regardless of its country of origin. Without model details, it is difficult to verify ratings, obtain the right manual or understand what happens if a part fails.

Ask the installer to name the components and identify the replacement-parts route. A low price does not prove a short lifespan, but an unspecified component makes both the installation and future support harder to assess.

How DirectHome Helps

Follow the support route

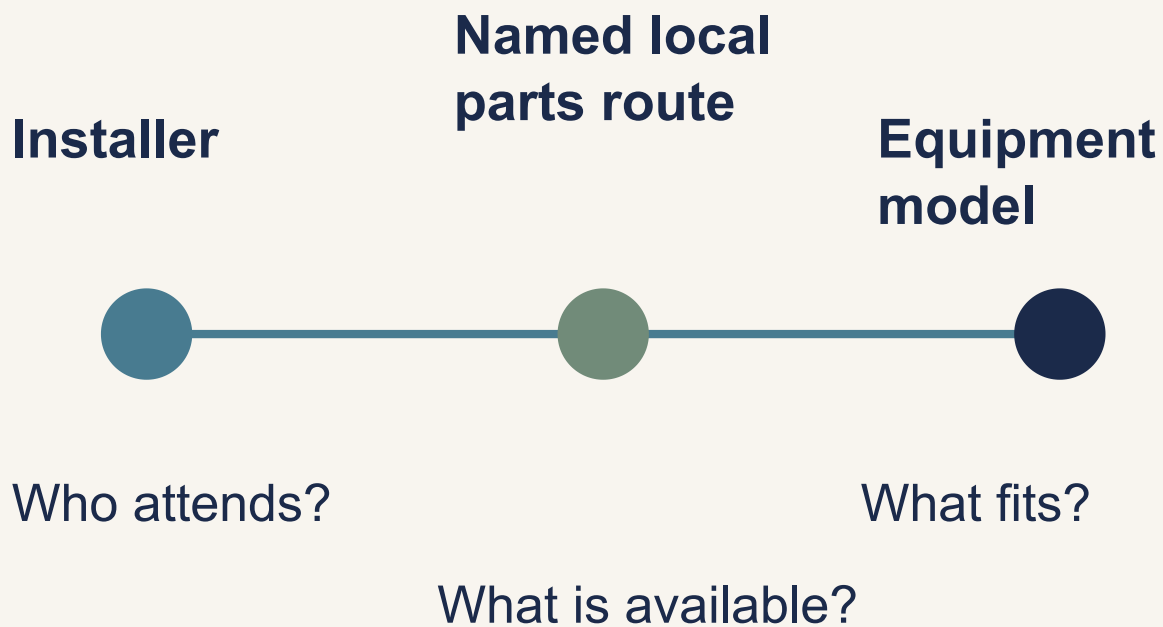

Ask who attends a fault, where compatible parts come from and which exact model they support. Confirm availability rather than assuming it.

Send [DirectHome](#) the gate type, approximate opening and photos taken while it is stationary from a safe position. Include the operator details from an externally visible label if available; do not open the control housing to find them.

Use that information to discuss the installation scope, then compare itemised proposals and support terms. Confirm the contracting party and service arrangements before committing. A recommendation should be tied to the actual gate rather than a universal brand winner.

Frequently asked questions

What is the best auto gate brand in Singapore?

Choose by the gate: FAAC 412 is a shorter swing-leaf reference, while BFT PHOBOS BT A25, DEA LOOK, Nice TO4024 and Beninca BOB3024E have different swing limits and configurations. CAME BXV06AGS is a sliding-gate example. The exact model still needs site assessment and written Singapore support terms.

Why is FAAC more expensive than other auto gate brands?

A price difference needs an itemised comparison of equivalent installed systems. Operator type, controls, safety devices, groundwork and support can all change the total. The FAAC name alone does not establish a standard Singapore premium.

Are cheap unbranded auto gate kits worth it?

Ask for the exact model, specifications, safety design and replacement-parts arrangements. A low price or country of origin does not establish reliability; an unidentified component makes the proposal difficult to assess.

Which auto gate brand is best for a heavy sliding gate?

CAME BXV06AGS is one sliding example with published limits of 600 kg and 18 m, but those figures are selection limits, not a recommendation for every heavy gate. Have the moving leaf, track or cantilever structure, wind load, usage and safety design checked together.

More on auto gates

[Article](#) [Auto Gate Installation Timeline: From Measuring to Fitting](#)

[Article](#) [304 vs 316 Stainless Steel Gates: Is 316 Worth More?](#)

[Article](#) [Auto Gate Remote Not Working? Causes and Replacement Options](#)

Our service

Auto Gates for your home

Explore the service, then discuss what your home needs with our team.

[View service details ↗](#)

Still weighing your options?

Plan with the buying guide

Bring the choices, costs and questions together before deciding what to do next.

[Read the auto gates buying guide →](#)

[More auto gates articles →](#)

Ready to discuss your home? [WhatsApp our team](#) or [request a quote](#).