

Staircase Renovation Guide: Materials, Design and What to Plan

By [DirectHome Team](#)

Updated 16 September 2026

5 min read

[Explore our staircase renovation service ↗](#)


Start a staircase renovation by deciding what needs to improve: the appearance, comfort, layout or condition of the stairs. That determines whether new finishes are enough or whether more substantial work is needed. Materials and design choices are easier to compare once the scope includes the landings, railings and route through the house.

Need advice for your home?

[WhatsApp our team ↗](#)




Name the part being changed

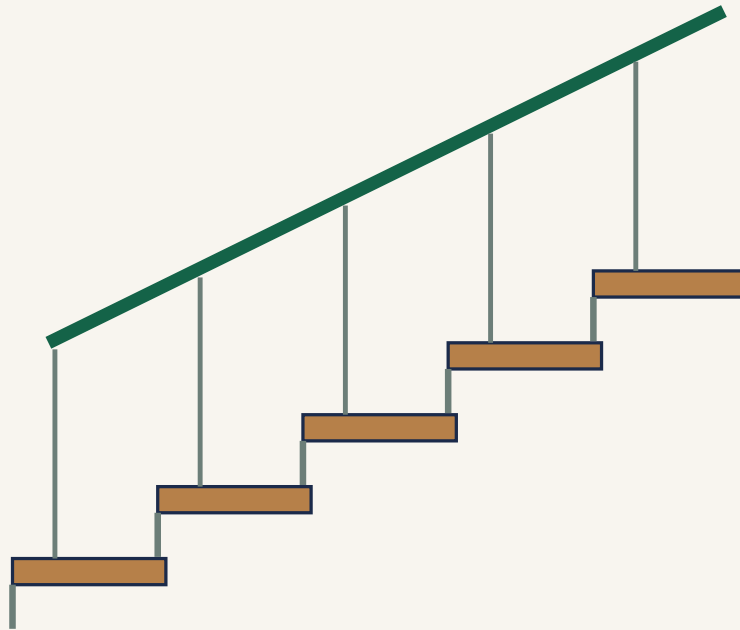

- **Tread and riser**
The surfaces at each step.
- **Support**
The structure carrying the flight.
- **Rail and guarding**
Grip and edge protection.

Tread and riser: The surfaces at each step. Support: The structure carrying the flight. Rail and guarding: Grip and edge protection. Schematic only; no dimensions or site-specific approval are implied.


Why Renovate Your Staircase?

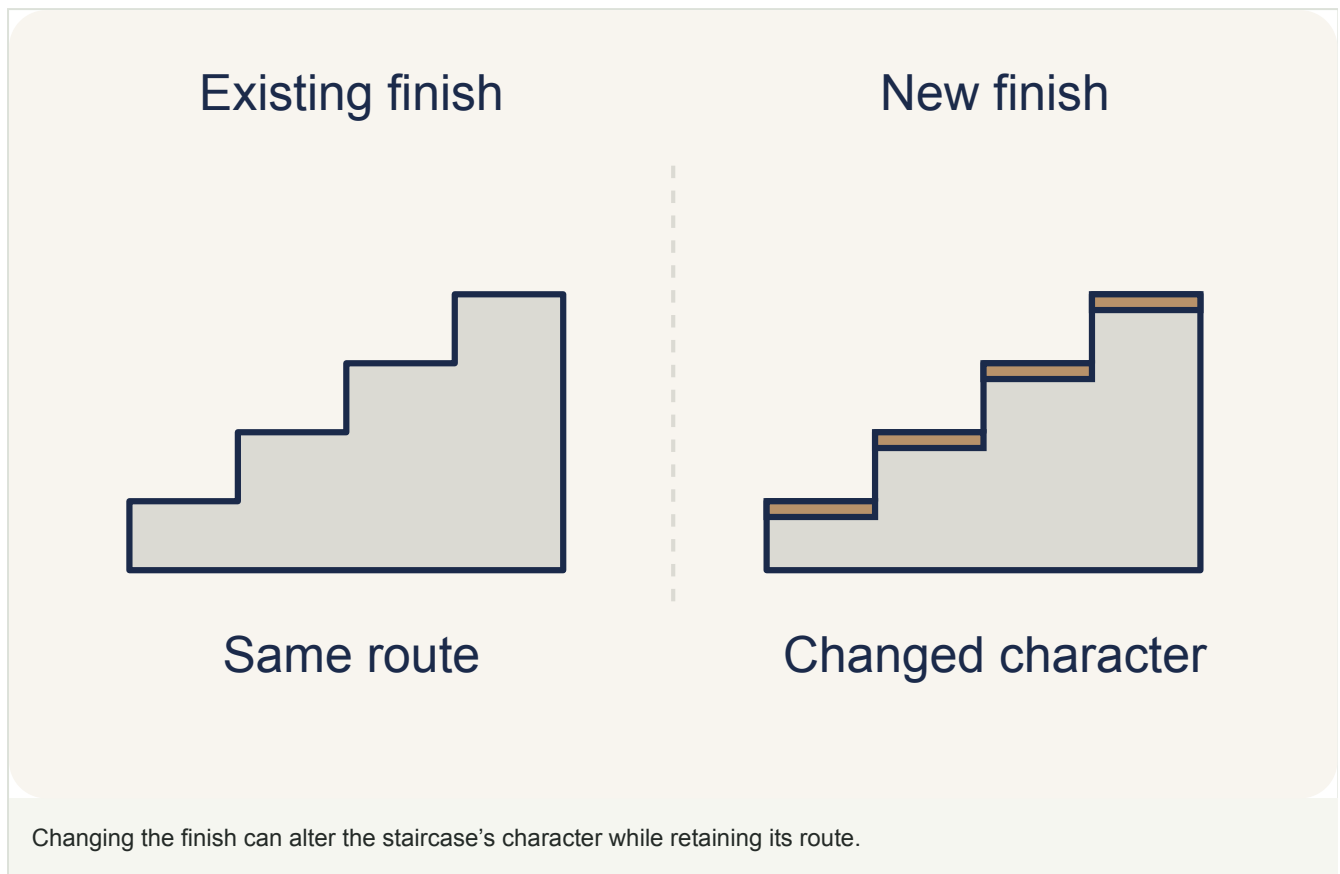


Your [staircase](#) is one of the most visually prominent features in a landed home. You see it every time you enter. Yet many homeowners overlook it during renovations, living with dated tile treads, worn carpeting, or generic aluminium railings that drag down the entire interior.

Changing treads and [balustrades](#) can alter how light moves through the stairwell and how the staircase feels underfoot. Open risers and transparent barriers also bring safety and design requirements. Establish what the existing structure and household need before selecting a visual style.


Popular Materials and Styles



Timber



Stone



Mixed finish

Compare the finished materials beside the surfaces already in the house.

Timber treads can add warmth and can be specified in different species and finishes. Compare the actual product, construction and moisture requirements, together with the nosing and slip performance. A species name alone does not establish a suitable stair finish.

Stone can give the stairs a continuous mineral appearance, but marble needs care that avoids acid etching; sealing improves stain resistance without making it stainproof. Terrazzo gives a speckled aggregate pattern, with colour and chip size selected as part of the finish. For precast terrazzo treads, agree the fabricated shape, compatible bedding and nosing together. Both options need their weight, edge details and actual surface grip checked for the existing stair.

Timber, steel and glass can be combined, but each interface needs design. Include the supporting structure, barrier system, handrail and adjacent finishes in the quote. A photograph of an open staircase is not a buildable specification.

Choose timber when you want grain and warmth underfoot and are prepared to look after its finish. Choose stone for its natural pattern, or terrazzo when you want a controlled aggregate-and-colour composition, provided the proposed support and surface suit the household. A sample should help you compare cleaning and step visibility as well as appearance.


Compare the upkeep and practical trade-offs alongside the finish you prefer. [staircase material choices](#) →

Want an exact price for your home?

Ranges only go so far. WhatsApp us a photo of your space and we'll quote your actual job. No obligation.

[WhatsApp us](#) Try the free cost estimator

Structural Considerations

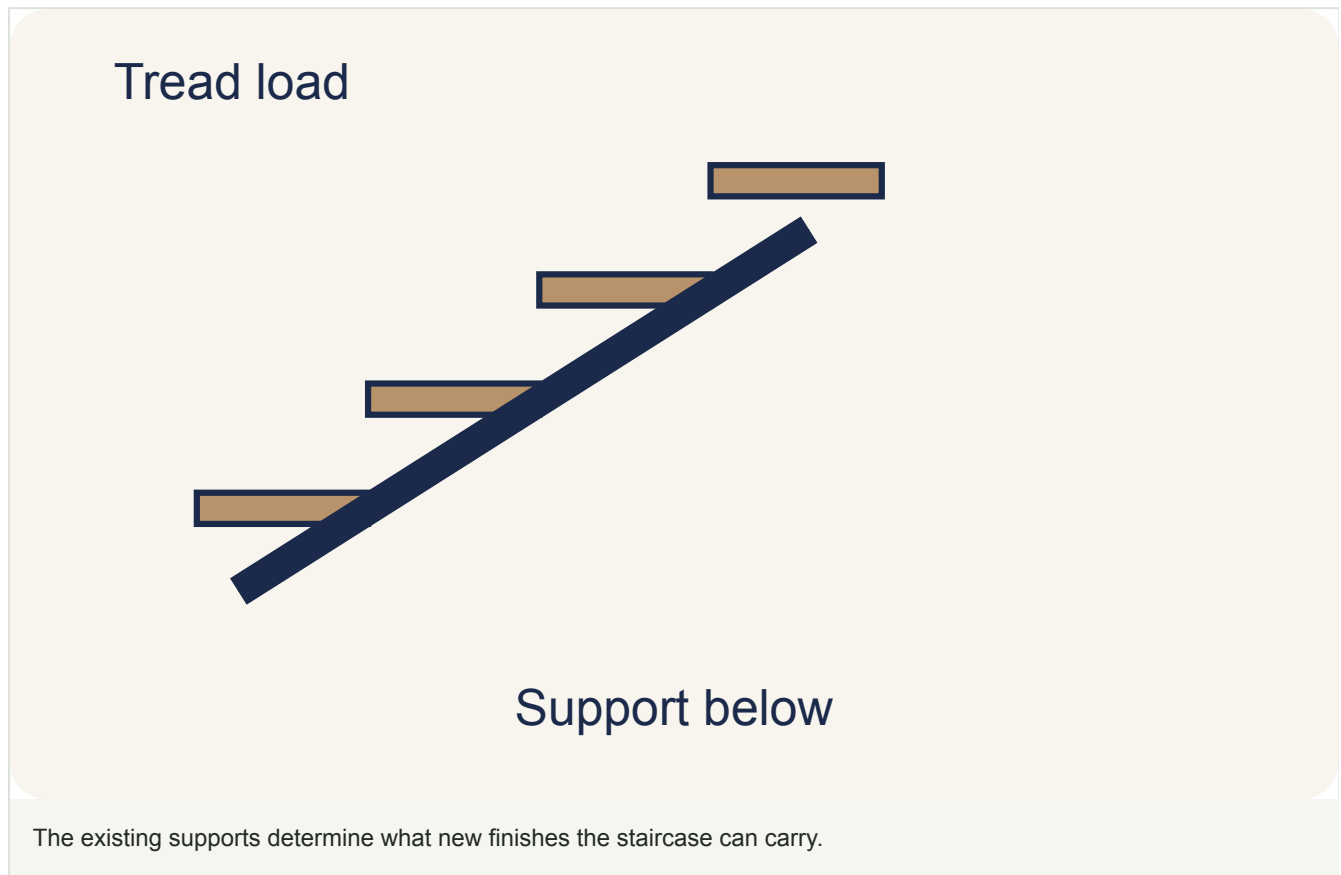

Before choosing materials, have a structural assessment done. Your existing staircase structure (concrete, steel, or timber) determines what's feasible. Adding heavy stone to a timber-framed staircase, for example, may require structural reinforcement.

If you're changing the railing design, particularly removing a solid wall balustrade and replacing it with glass or metal balusters, a structural engineer should verify that the landing and staircase structure can handle the load redistribution.

Check the approval implications of the proposed structural changes before work begins. [staircase approval considerations](#) →

Budget for a New Finish or a New Staircase

2026 guide amounts; not a material-by-material price list or a DirectHome quotation. Detailed inclusions and tax are unspecified.


Scope	Indicative Singapore guide figures	Confirm before budgeting
Refinish timber treads or retile	S\$3,000–S\$6,000	Step count, preparation, landings and finish
Replace the entire staircase	S\$15,000–S\$35,000	Support, treads, guarding and affected building work

S\$3,000–S\$6,000 for refinishing timber treads or retiling, versus S\$15,000–S\$35,000 for replacing the staircase, gives you a starting distinction between renewing the surface and rebuilding the flight.

These indicative 2026 guide figures do not specify step count, railings or tax. They should help set the scope of the first discussion; the actual drawings and itemised quotation set the budget.

Do not put a new stone overlay into the refinishing allowance automatically. Bespoke tread fabrication, supporting work and new barriers may change the job substantially. Keep engineering, removal, access protection, lighting and making good visible so a lower staircase package does not hide work elsewhere in the house.

Safety Requirements

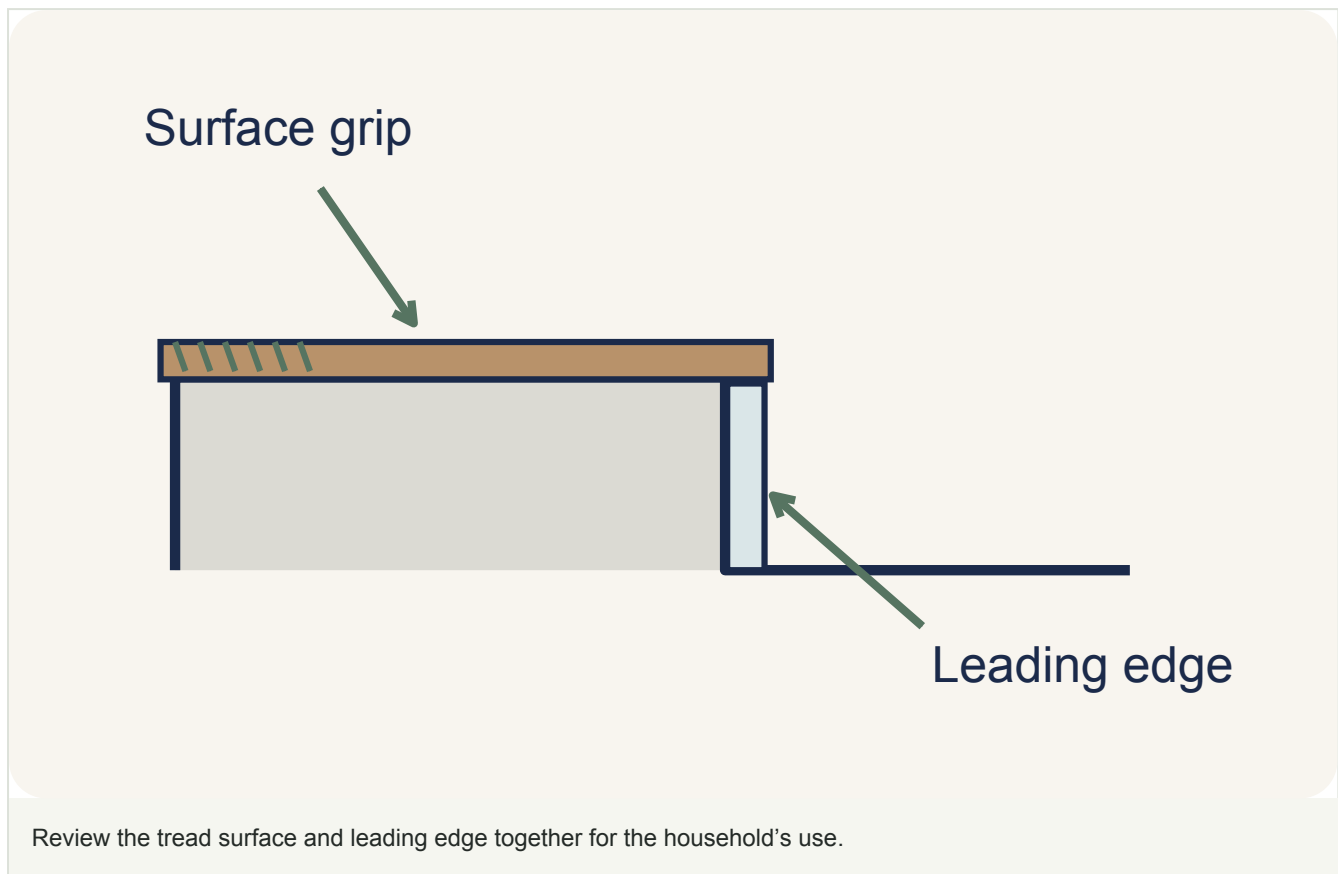

The applicable requirements for stairs, [handrails](#) and protective barriers depend on the design and location. Have the responsible designer check dimensions, openings, height, strength and fixing details against the relevant requirements. Handrail height and barrier height are not interchangeable.

Assess the actual tread finish for slip resistance, including the nosing and lighting. A timber species or stone name alone cannot guarantee grip. Avoid changes that create uneven rises, loose strips or abrupt transitions at the landings.


The Renovation Process

Finish decisions have an order




Assess the existing flight

Establish what can remain.



Coordinate hidden work

Resolve lighting before new finishes.



Return the complete route

Agree readiness before normal use.

Assess the existing flight: Establish what can remain. Coordinate hidden work: Resolve lighting before new finishes. Return the complete route: Agree readiness before normal use. Schematic only; no dimensions or site-specific approval are implied.

The programme depends on removal, structural work, fabrication, fixing and curing. Ask for those stages and readiness conditions in the contractor's plan. A finish-only overlay and a structural rebuild have different disruption and approval requirements.

If this is the only stair, agree a safe household access plan before work begins. Continuous use may not be possible during demolition or while barriers and finishes are incomplete. Do not rely on stepping over unfinished work to maintain access.

Coordinate the balustrade, lighting and adjoining floors in the scope so their connections are designed before installation. Identify who is responsible for protection, dust control and making good.

Send [DirectHome](#) photographs, available plans and the changes you want to discuss a staircase assessment. Confirm its scope, availability and any charges before booking.

More on staircase renovation

[Article](#) [Staircase Overlays: Don't Overlook the First and Last Steps](#)

[Article](#) [Safer Stairs for Children and Older Parents: A Practical Guide](#)

[Article](#) [Staircase Handrails: How to Choose a Comfortable Grip](#)

Our service

Staircase Renovation for your home

Explore the service, then discuss what your home needs with our team.

[View service details ↗](#)

Still weighing your options?

Plan with the buying guide

Bring the choices, costs and questions together before deciding what to do next.

[Read the staircase renovation buying guide →](#)

[More staircase renovation articles →](#)

Ready to discuss your home? [WhatsApp our team](#) or [request a quote](#).