

Dimmable LED Lights Flickering? What Your Installer Should Check

By [DirectHome Editorial](#)

Updated 15 September 2026

7 min read

[Explore our ceiling & lighting service ↗](#)

If an LED light flickers when dimmed, the lamp and dimmer may not be working well together. A “dimmable” label does not establish compatibility with every control or lighting arrangement. Ask the installer to check the exact products and how they are connected before replacing a roomful of fittings or assuming the dimmer alone is faulty.

Need advice for your home?

[WhatsApp our team ↗](#)




Ask the installer to check the lamps, dimmer and number of lights on the circuit together. This is particularly important when products came from different suppliers. If you are also planning [ceiling and lighting work](#), confirm compatibility before ordering the replacement fittings or controls.


Why a light that turns on may still dim poorly

Dimming depends on the combination

Control model

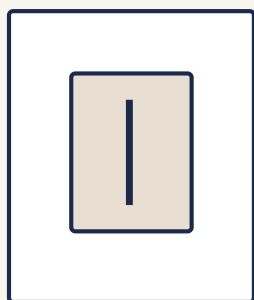

Light + driver model

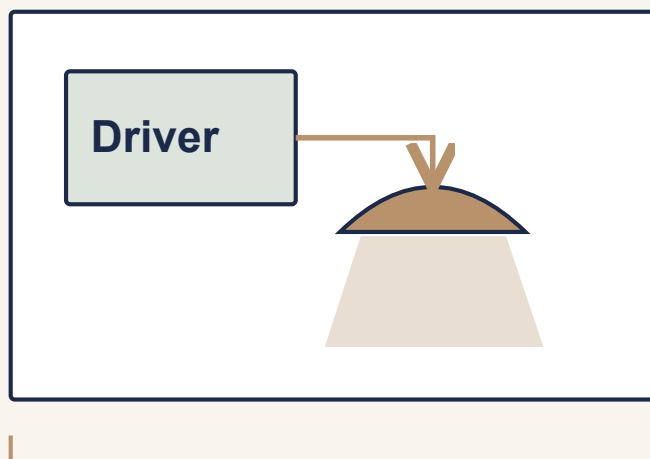

Quantity on this control

Verify the combination. The diagram is not a wiring plan.

The driver may be built into the lamp or fitting, or supplied separately. This diagram shows the selection relationship, not a wiring arrangement.

An LED lamp contains electronics that operate differently from an old filament lamp. With mains dimming, the control changes the power waveform reaching the lamp, and the electronics must be designed to work with that behaviour. A manufacturer's [explanation of mains-dimmable LED technology](#) describes why compatibility requires particular circuitry.

For a homeowner, the consequence appears in ordinary use: the light may behave acceptably at full output but offer an unsatisfactory low setting, an abrupt change or visible flicker while dimming. Those symptoms are reasons for the installer to investigate. They do not allow you to diagnose a specific component from appearance alone.

There is another distinction at the fixture. A replaceable LED bulb and an integrated LED fitting are different purchasing arrangements. In the integrated fitting, the supplied or specified driver can be part of the compatibility question. An invoice that names only the decorative fitting may leave out the component that determines how it is controlled.

Check the exact light and dimmer models tested together

A compatibility card for the proposed installation. The electrical worker determines the electrical design and suitability.

Record for each controlled group	What to identify
Light	Exact lamp or luminaire model and supplied version.
Driver, where applicable	Exact model, control method and location in the installation.
Control	Exact dimmer or control-system model and relevant configuration.
Group	Quantity and types of lights operated together.
Evidence	Applicable manufacturer document or written confirmation, with date and market.
Expected use	Useful low setting, dimming behaviour and normal switch operation.
Responsibility	Who confirms the combination and resolves an unsuitable result.

A useful confirmation names exact model codes, including the relevant light or driver version. “Works with LED” is too broad. A dimmer product family can contain several models, and a fitting sold with alternative drivers may support different control methods. Match the documents to the products being supplied.

Manufacturer [compatibility matrices](#) illustrate the level of detail involved: identified lamps and dimmers, quantities and notes about tested behaviour. The linked example is dated 2022. It explains the structure of evidence; it should not be used as approval for a current purchase. Request the latest applicable information from the supplier.

Check the document’s market as well as its date. Confirm that its model codes and market apply to the products being supplied; a link from a local page is not enough. The supplier and electrical worker should confirm the actual local combination.

A blank or “not tested” entry leaves compatibility unestablished. It is not automatically a fail, and it is not a pass. Obtain specific confirmation or select a documented alternative. Where a supplier proposes a demonstration, record its exact components and limits so it does not become a vague assurance based on a different lamp.


Want an exact price for your home?

Ranges only go so far. WhatsApp us a photo of your space and we'll quote your actual job. No obligation.

[WhatsApp us](#) [Try the free cost estimator](#)

Recheck compatibility if a model or the number of lights changes

One control, a specific group of lights

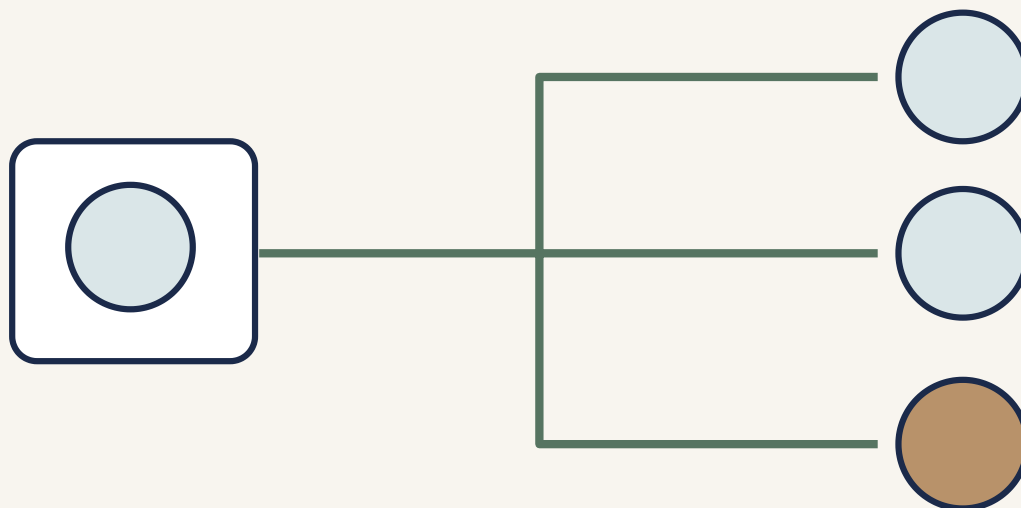

A substitution changes the combination

Changing a model or the number of lights can change the control combination.



A successful demonstration with one light does not necessarily establish the behaviour of a different group. Compatibility information can specify a range of lamps on a control. Have the installer check the proposed quantity and any mixture of fittings against the selected equipment's requirements. Do not infer an acceptable quantity by dividing a headline dimmer wattage by a bulb wattage.

The same reasoning applies to substitutions. A replacement with the same visible shape or nominal brightness may contain different electronics. If the supplier changes a lamp, driver or control before delivery, have the combination reviewed again. A finish-colour substitution and a driver substitution do not have the same effect on this decision.

This is also why keeping model information matters after handover. When a bulb or driver eventually needs replacement, the record provides a starting point for a suitable match. Buying the closest-looking item can leave one part of a previously consistent group behaving differently.

Decide what you mean by a good low setting

Brightness and colour are separate

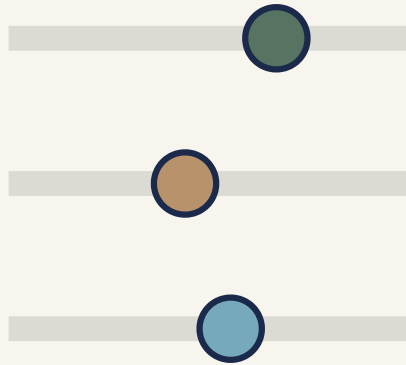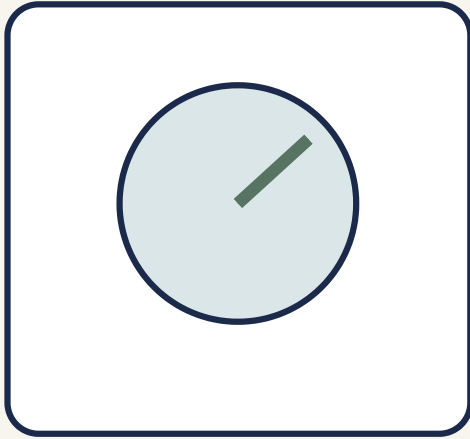

Describe the low scene you want

Describe the useful low-light scene rather than only the slider position.

Dimming brightness and changing colour tone are separate behaviours. Some [dim-to-warm products](#) become warmer in appearance as output reduces; ordinary dimmable products may simply become less bright. If you want that warmer evening effect, specify it rather than assuming every dimmable LED produces it.


Describe the intended scene in plain language. For example, a dining pendant may need a comfortable low level for a quiet meal while still giving enough light to see the table. A reading light has a different task. A slider reaching its minimum position is not the same thing as the room reaching a useful minimum brightness.

Control grouping matters as much as the dimming range. If a wall wash and the reading lights always rise and fall together, the room may offer less flexibility than expected even when every component is compatible. Resolve which lights need to operate independently before treating the wall plate as a purely decorative selection.

Consider where fittings, drivers and wiring can go before choosing the dimming combination. [Good lighting without a full false ceiling →](#)


Demonstrate the behaviour you intend to use

Demonstrate the dimming sequence

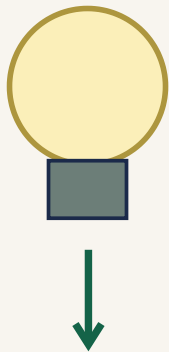


Start at ordinary brightness

Use the actual selected combination.

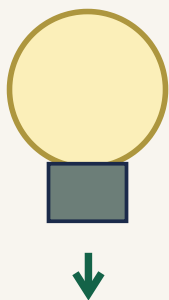

Move to the low scene

Judge the intended evening setting.

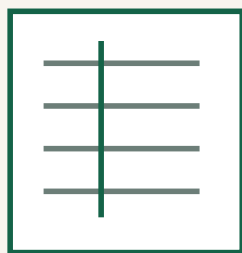

Switch off and restart

Observe the behaviour expected in normal use.

Start at ordinary brightness: Use the actual selected combination. Move to the low scene: Judge the intended evening setting. Switch off and restart: Observe the behaviour expected in normal use. Schematic only; no dimensions or site-specific approval are implied.

Agree the ordinary-use demonstration before installation is complete. The supplier or installer should present the proposed or installed combination using its intended controls, with any limitations explained. The homeowner's role is to observe whether the result serves the room. It does not include opening fittings, altering wiring or experimenting with electrical components.

Review the intended controls with the installer

- ☐ Switch the group on and off using its normal controls and observe whether all intended lights respond.
- ☐ Move through the intended brightness range and observe abrupt changes or visible instability.
- ☐ Review the agreed low setting from the normal seating position, after the room is arranged for the intended use.
- ☐ Observe any unwanted visible glow or behaviour after normal switch-off and have the installer assess it.
- ☐ Confirm that separate groups and any named scenes operate as agreed, and retain the final model record.

Use this blank checklist to record your project review.

This review is a practical acceptance aid, not a laboratory flicker measurement or an electrical safety test. A phone video can show banding affected by the camera and display as well as the light, so it should not be treated as a diagnosis by itself. Record a concern and have the installer evaluate it using appropriate methods. Fixed electrical work must be carried out or supervised by an appropriately licensed electrical worker.

The ceiling and lighting buying guide connects controls with the room layout, ceiling work and maintenance access. Keep the agreed light, driver and dimmer models with the drawings, including how many lights each control serves. Ask the installer to demonstrate the settings you intend to use before handover, while any poor dimming behaviour can still be addressed.

More on ceiling & lighting

Article [3 Lighting Ideas for a Double-Height Living Room](#)

Article [Better Lighting Without a Full False Ceiling](#)

Article [Safer Stairs for Children and Older Parents: A Practical Guide](#)

Our service

Ceiling & Lighting for your home

Explore the service, then discuss what your home needs with our team.

[View service details ↗](#)

Still weighing your options?

Plan with the buying guide

Bring the choices, costs and questions together before deciding what to do next.

[Read the ceiling & lighting buying guide →](#)

[More ceiling & lighting articles →](#)

Ready to discuss your home? [WhatsApp our team](#) or [request a quote](#).